


Kanaflo FG (210 HFG)

Heavy-duty food grade suction and discharge hose

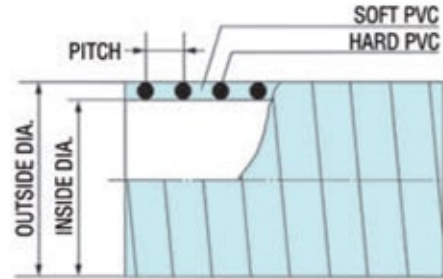

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Heavy-duty food grade suction hose for bottling and dairy industries

Construction: Produced entirely of compounds in compliance with FDA and 3-A nontoxic specifications, flexible PVC, rigid PVC helix, smooth bore, smooth O.D.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
3/4	.96	0.22	1.9	86	29.8	0.16	100
1	1.25	0.22	1.9	86	29.8	0.26	100
1-1/4	1.54	0.26	2.7	79	29.8	0.37	100
1-1/2	1.82	0.30	2.8	72	29.8	0.44	100
2	2.39	0.33	3.9	72	29.8	0.74	100
2-1/2	2.93	0.37	5.0	72	29.8	1.01	100
3	3.43	0.37	7.0	62	29.8	1.21	100
4	4.53	0.43	9.1	55	29.8	2.01	100



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories