

The Kanaflex **Banding Coil** and **Banding Sleeve** are designed to fill the helix gap and provide a stable surface for banding. The **Powerlock Clamps** and **Duct Clamp** are designed, specifically, to be used with Kanaflex hoses.

Accessory Products

Kanaflex accessories are engineered to the highest quality standards to provide smart security and confidence when using Kanaflex hoses


Banding Sleeve

Plastic banding sleeve available in 3" and 4" sizes

Temp. Range: -40°F to 140°F

Applications: 9" sections are recommended at each end of the Kanaline Series tank truck drop hose


Construction: PVC construction, corrugated inside, smooth O.D.

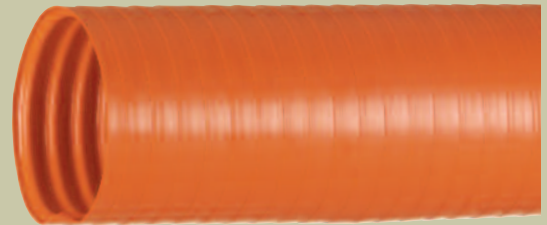

Banding Coil (black or white)

Black or white PVC banding coil available in 1-1/2", 2", 3", 4", 5", and 6" sizes

Applications: PVC Banding Coil designed to fit and fill the area between the helix providing a smooth service for installation of tension bands. Use 4" of banding coil to cover 9" length of the hose. Also, when used behind the coupling, the coil adds rigidity to the hose, preventing over flexing at the coupling. Coil can be installed on individual hoses as noted.

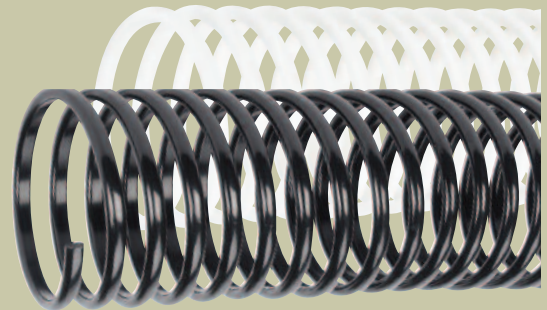

Duct Clamp

Steel, worm gear type clamp designed specifically for use with our duct hose. Easily installed with only a screw driver. Available in 2-1/2", 3", 4", 5", 6", 7", 8", 10" and 12" sizes.



Powerlock Clamp / Powerlock Clamp PS

The Powerlock clamp is a steel, double bolt clamp designed specifically for use with our corrugated hose such as Series 100, 180, 200 and KANALINE. Available in 2", 2-1/2", 3", 4", 5", 6", 8", 10" and 12" sizes.

The Powerlock clamp PS is available for use with our 101 PS Series in 2", 3" and 4" sizes.



Guideline for Tightening Kanaflex Powerlock Clamps

Please use the table below to determine the correct torque recommended when tightening down our Powerlock clamps.

Size (in)	2	2½	3	4	5	6	8	10	12
Torque (lbs-ft)	7.2	7.2	9.4	14.5	14.5	16.6	16.6	18.1	18.1

